



 HAHN Lamellen		Louvre window S9-iVt-05 Allglas (50mm frame)			
status:		☐ enquiry	☐ order	ESG = Toughened glass VSG = Laminated glass	
project number:			purchase order:		
project manager:			phone number:		
desired delivery date:			date:		
project:					
delivery address:					
contact person on site:					
Pos.:		01	02	03	
no.:					
frame dimensions	width: (mm)				
	height: (mm)				
	type of frame:	☐ type 1 ☐ type 2 ☐ type 3 thickness: _____mm (see detail glazingprofile)	☐ type 1 ☐ type 2 ☐ type 3 thickness: _____mm (see detail glazingprofile)	☐ type 1 ☐ type 2 ☐ type 3 thickness: _____mm (see detail glazingprofile)	
no. of blades:					
blade panel type	glass design: (outer side / air space / inner side)	☐ 6(ESG) / 20 / 8(Float) ☐ 6(ESG) / 20 / 8(VSG) ☐ other _____		☐ 6(ESG) / 20 / 8(Float) ☐ 6(ESG) / 20 / 8(VSG) ☐ other _____	
	type of glass:				
finish	finish:	☐ powder coated ☐ natural anodised	☐ powder coated ☐ natural anodised	☐ powder coated ☐ natural anodised	
	colour supplier & colourcode:				
controls	type of control:	☐ manual ☐ electric _____V ☐ pneumatic	☐ manual ☐ electric _____V ☐ pneumatic	☐ manual ☐ electric _____V ☐ pneumatic	
	description:				
	cable length: (standard = 2,5m)	_____ m	_____ m	_____ m	
	cable exit: (LAH 65 only)	☐ top ☐ bottom ☐ side through frame	☐ top ☐ bottom ☐ side through frame	☐ top ☐ bottom ☐ side through frame	
	control position:	☐ position A (right side) ☐ position B (left side) height _____ mm	☐ position A (right side) ☐ position B (left side) height _____ mm	☐ position A (right side) ☐ position B (left side) height _____ mm	
fixing brackets / special adaptor:					
smoke vents CE- certified:		☐ yes ☐ no	☐ yes ☐ no	☐ yes ☐ no	

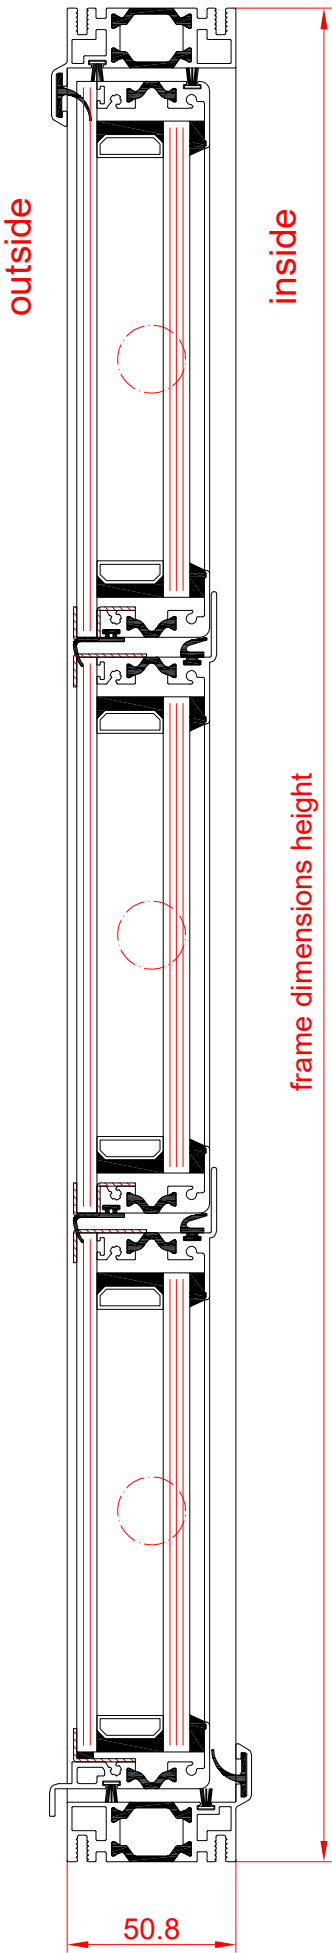


Frame type 1


Frame type 1

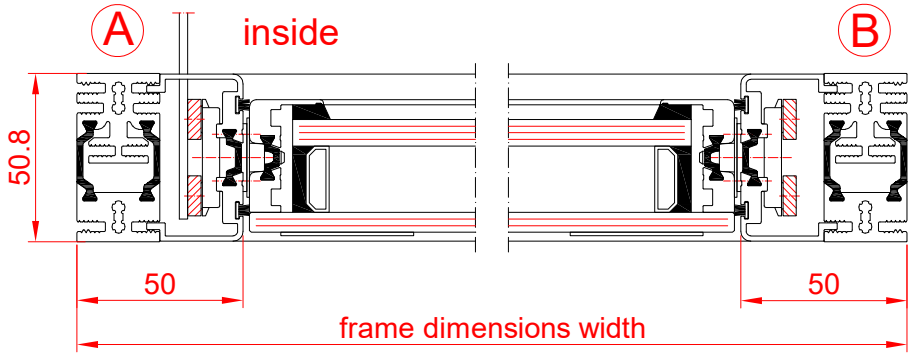


Frame type 2

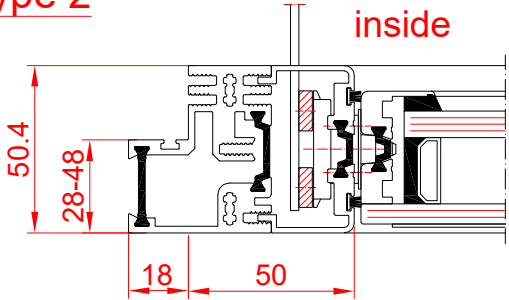

Frame type 3

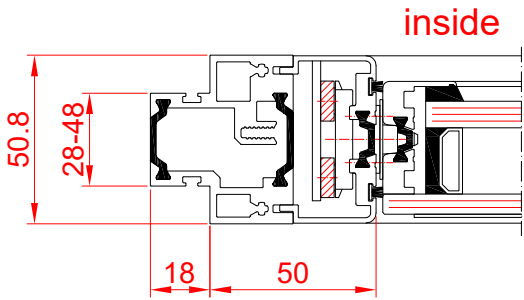

Frame type 2

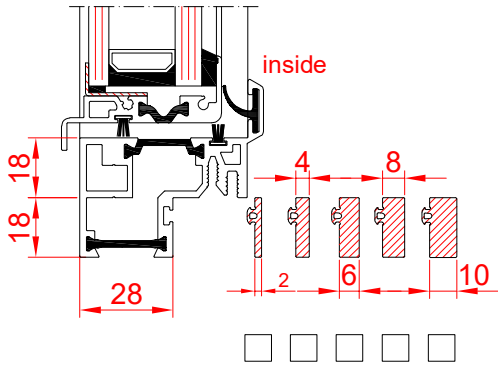

Frame type 3

